
## LASER PRODUCT

Туре:	CPLS-S1
Colour	Red
Application	Laser Liner
Operating supply	2,7 - 3,8 VDC
<b>Operating Current</b>	> 30mA
Wavelegth	650 nm
Outut Power	3,5mW
Operating Temperature	-10 °C +50 C
Storage Temperature	-40 °C +80 C
Focus Mode	Adjustable
Spot Diameter	Adjustable
Starting Time	> 0,01sec
Size	9 x 21 mm
Material of the shell	Copper

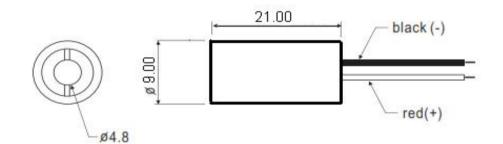

**Safety Conciderations:** 

1. This product compliers with 21 CFR 1040.10 and 1040.11

2. The beam emitted from the laser module is visible and may be harmful to the human eye. Avoid any possibility of looking into the laser package or the collimated beam along its optical axis when the devise is in operation.

3. ESD precautions must be taken when handling unit.

4. Visible laser radiationavoid direct exposure to beam

